
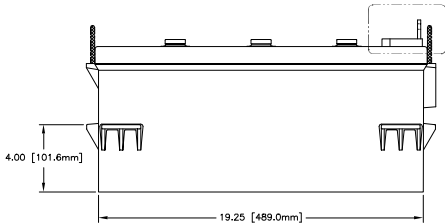




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00303 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

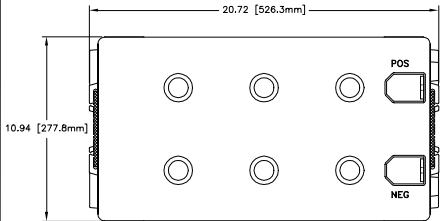

PVX-2580 TERMINAL OPTIONS



CAPACITY RATINGS	
PART NUMBER	PVX-2580
NOMINAL WEIGHT	165 LBS [75 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77F (25° C)	258 AH

ENVELOPE DRAWING

REV	DATE	DESCRIPTION	APPROVED	DATE	DESCRIPTION	REV
PARTS LIST						
CONTRACT NO.		CONCORDE BATTERY CORPORATION				
NA		2009 SAN BERNARDINO RD., W. COVINA, CA 91790				
APPROVALS		TITLE				
DATE	DATE	BATTERY, SLA, 12 VOLT,				
8/13/01	8/21/01	PVX-2580				
DRW NO.	REV	C 63017				
8/23/01	8/24/01	SCALE NONE				
SHEET 1 OF 1						