


M40 SLD G

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	48Ah
Capacity at C/20	40Ah
Weight	31.7 Lbs. (14.4 kg)
Plate Alloy	Lead Calcium
Posts	Forged terminals & bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) – 140°F (60°C)
Charge Voltage @ 68°F (20°C)	
Cycle	2.30 - 2.35 VPC
Float	2.25 - 2.30 VPC
Vent	Self-sealing (2 PSI operation)
Electrolyte	Sulfuric acid thixotropic gel
Resistance	4.0 Milliohms (full charge)
Terminal	FEM 1/4"



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A by East Penn Manufacturing


Valve-Regulated, Gelled-Electrolyte Battery



DIMENSIONS

Length (mm)	7.75 (197 mm)
Width (mm)	6.63 (168 mm)
Height (mm)	6.88 (175 mm)

Cycling Ability

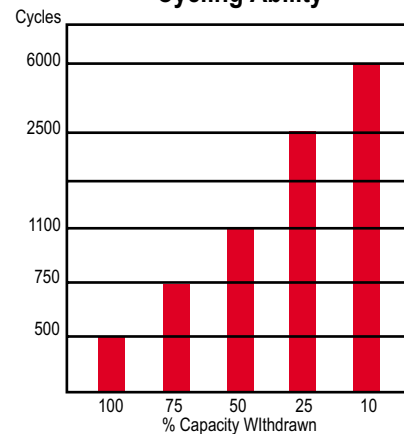

Number of cycles vs. depth of discharge
at +20°C
discharge with 20 hour rate

MK Battery

1645 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-Mail: sales@mkbattery.com

