



## General Information

- High performance multi-crystalline cells
- High energy yields in a wide variety of climates
- Anodized aluminum frame provides for easy mounting

## Qualification and Certificates

- UL Listing Pending



**1 Watt Module**

## Electrical Characteristics

### Typical Data At STC


Rated Power	Pr	1W
Peak Power	Pmpp	1W
Peak Power Voltage	Vmpp	16.7V
Peak Power Current	Impp	0.075A
Open Circuit Voltage	Voc	21.0V
Short Circuit Current	Isc	0.9A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m<sup>2</sup> irradiance, AM 1.5 spectrum and 25° C cell temperature.

## Physical Characteristics

Length	Inches (mm)	9.38 (238)
Width	Inches (mm)	3.88 (98.6)
Thickness	Inches (mm)	0.63 (16)

<b>Cable Type</b>	18/2	
Cable Length	feet (cm)	15.00 (457.2)

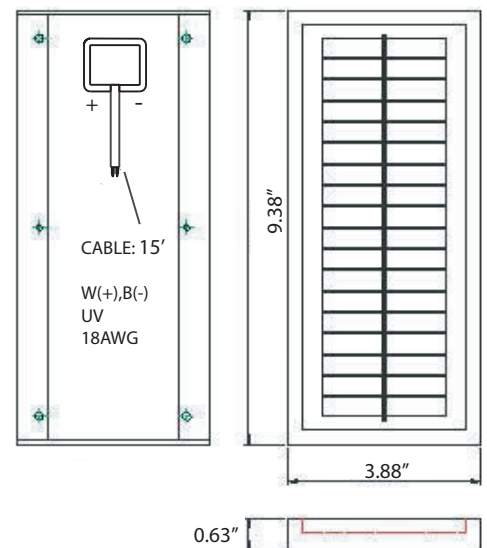

5 Year Warranty

**Online Solar, Inc.**  
**MrSolar.com**  
**PO Box: 1506**  
**Cockeysville, MD 21030**