




Online Solar, Inc.  
 MrSolar.com  
 PO Box: 1506  
 Cockeysville, MD 21030

## General Information

High performance multi-crystalline cells  
 High energy yields in a wide variety of climates  
 Anodized aluminum frame provides for easy mounting

## Qualification and Certificates

UL Listing Pending

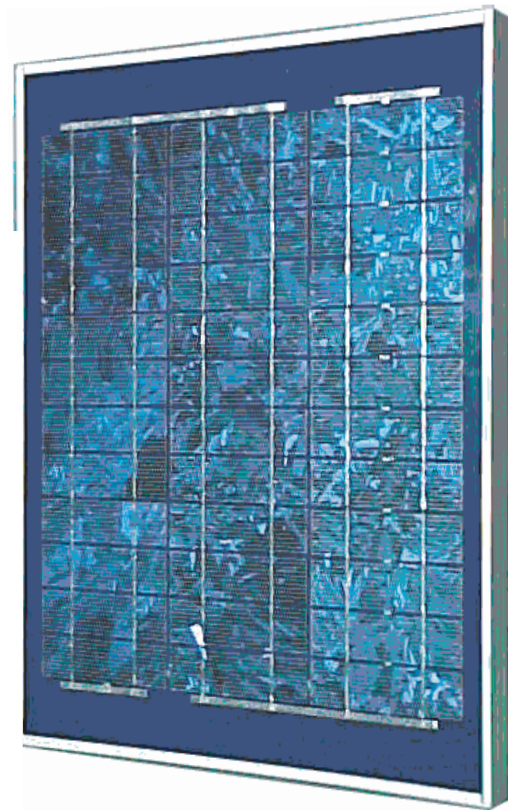

**20 Watt Module**

## Electrical Characteristics

### Typical Data At STC



Rated Power	Pr	20W
Peak Power	Pmpp	20W
Peak Power Voltage	Vmpp	17.3V
Peak Power Current	Impp	1.20A
Open Circuit Voltage	Voc	21.7V
Short Circuit Current	Isc	1.30A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m<sup>2</sup> irradiance, AM 1.5 spectrum and 25° C cell temperature.

## Physical Characteristics

Length	Inches (mm)	19.8 (503)
Width	Inches (mm)	16.7 (424)
Thickness	Inches (mm)	1.31 (33)

<b>Cable Type</b>	18/2	
Cable Length	feet (cm)	15.0 (457.2)



5 Year Warranty