




Online Solar, Inc.  
 MrSolar.com  
 PO Box: 1506  
 Cockeysville, MD 21030

## General Information

High performance multi-crystalline cells  
 High energy yields in a wide variety of climates  
 Anodized aluminum frame provides for easy mounting

## Qualification and Certificates

UL Listing Pending

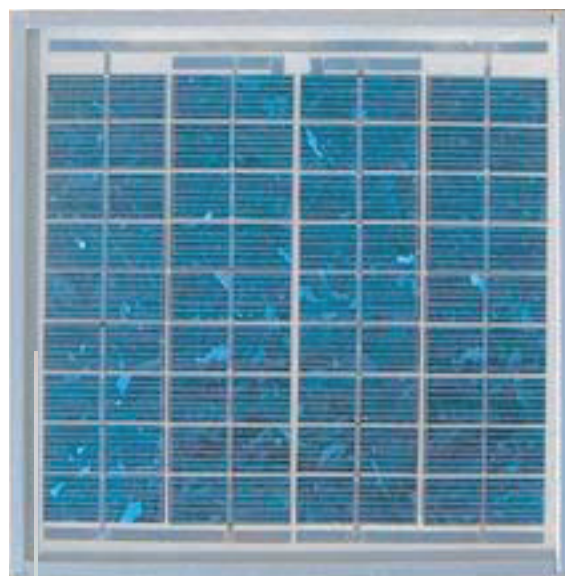

**5 Watt Module**

## Electrical Characteristics

### Typical Data At STC


Rated Power	Pr	5W
Peak Power	Pmpp	5W
Peak Power Voltage	Vmpp	17.0V
Peak Power Current	I <sub>mp</sub>	0.30A
Open Circuit Voltage	Voc	21.0V
Short Circuit Current	Isc	0.33A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m<sup>2</sup> irradiance, AM 1.5 spectrum and 25° C cell temperature.

## Physical Characteristics

Length	Inches (mm)	9.75 (248)
Width	Inches (mm)	9.38 (238)
Thickness	Inches (mm)	1.31 (33)

<b>Cable Type</b>	18/2	
Cable Length	feet (cm)	15.00 (457.2)

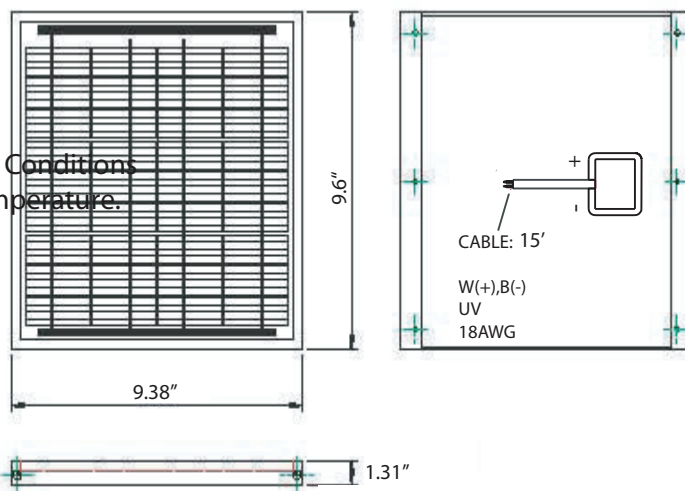

5 Year Warranty