


Notepower 50 and 75

xantrex

DC to AC Power Inverters

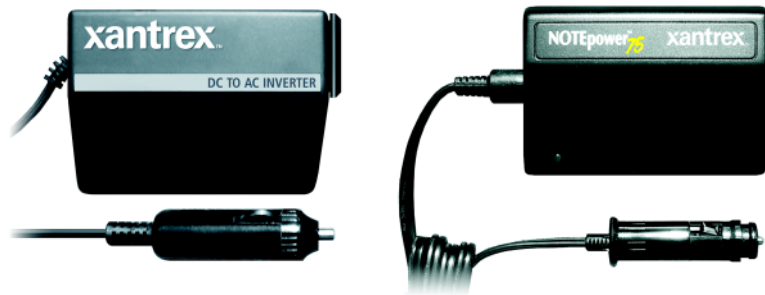

CSA/NRTL Certified to UL and CSA Standards
(Notepower 75 only)

Provides 50 and 75 watts of AC Power from a Vehicle's DC Socket

Notepower 50 and 75 inverters are convenient power accessories for running and recharging portable electronic equipment from a vehicle's DC outlet. Notepower inverters will operate small mobile office equipment and portable electronic products such as portable computers, printers, fax machines, camcorders and rechargeable power tools. Before the vehicle's battery becomes low, the inverters will shut down automatically, ensuring that there's always enough charge to start the vehicle.

Product Features

- ▶ 50 and 70 watts of maximum continuous power
- ▶ 150 watt surge rating
- ▶ LED power indicator
- ▶ Grounded, three prong AC receptacle
- ▶ Regulated output to protect equipment from voltage spikes and fluctuations
- ▶ Works with the AC adapter/charger supplied with your computer
- ▶ Compact, handheld size and easy to use
- ▶ One year warranty

Protection Features - Notepower 50

- ▶ Over temperature shutdown
- ▶ Under voltage protection
- ▶ Overload protection

Protection Features - Notepower 75

- ▶ Over temperature shutdown
- ▶ Over and under voltage protection
- ▶ Overload protection
- ▶ Short circuit protection
- ▶ Battery reverse polarity protection

Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5
800 670 0707 Toll Free
604 420 1591 Fax

5916 195th Northeast
Arlington, Washington
USA 98223
800 446 6180 Toll Free
360 925 5144 Fax

DC to AC Power Inverters

Electrical Specifications

Notepower 50		Notepower 75	
Maximum continuous power	50 W	Maximum continuous power	70 W
Surge rating	150 W	Surge rating	150 W
No load current draw	<0.07 A	No load current draw	<0.15 A
Peak efficiency	90% approx.	Peak efficiency	90% approx.
Output wave form	Modified sine wave	Output wave form	Modified sine wave
Output frequency	60 Hz +/- 3 Hz	Output frequency	60 Hz +/- 3 Hz
Output voltage	120 VAC +5/-9 VAC	Output voltage	120 VAC +5/-9 VAC
Input voltage range	10-15 VDC	Input voltage range	10-15 VDC

General Specifications

Notepower 50		Notepower 75	
Operating temp. range	32°F - 104°F (0°C – 40°C)	Operating temp. range	32°F - 104°F (0°C – 40°C)
Storage temperature	-4°F - 140°F (-20°C – 60°C)	Storage temperature	-4°F - 140°F (-20°C – 60°C)
AC receptacles	1 grounded 3 prong	AC receptacles	1 grounded 3 prong
Dimensions (HxWxL)	1.3 x 2.5 x 3.5" (33 x 65 x 90mm)	Dimensions (HxWxL)	1.6 x 3.2 x 4.8" (40 x 80 x 120mm)
Weight	7.2 oz (0.2kg)	Weight	14.4 oz (0.4kg)
Part number	801-6000	Part number	801-7000
Warranty	One year	Warranty	One year

Regulatory Approvals (Notepower 75 only)

CSA/NRTL Certified to CSA 107.1 and UL 458

Note: Specifications subject to change without notice.