

EPGC15G

SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/6	178Ah
Capacity at C/20	215Ah
Capacity at C/100	239Ah
Weight	63 (28.6 kg)
Container/Cover	Polypropylene
Operating Temperature Range	60°F (16°C) – 120°F (49°C)
Charge Voltage @ 68°F (20°C)	
Cycle	1.15 - 1.17 VPC
Float	1.20 - 1.22 VPC
Vent	Individual quarter - turn bayonet vent cap
Terminal	T881
Self Discharge	1% per week


ISO 9001 ISO/TS 16949
Made in USA by East Penn Mfg.

Flooded Battery, Wet Type



DIMENSIONS

Length (mm)	10.25 (260 mm)
Width (mm)	7.13 (181 mm)
Height (mm)	10.63 (270 mm)

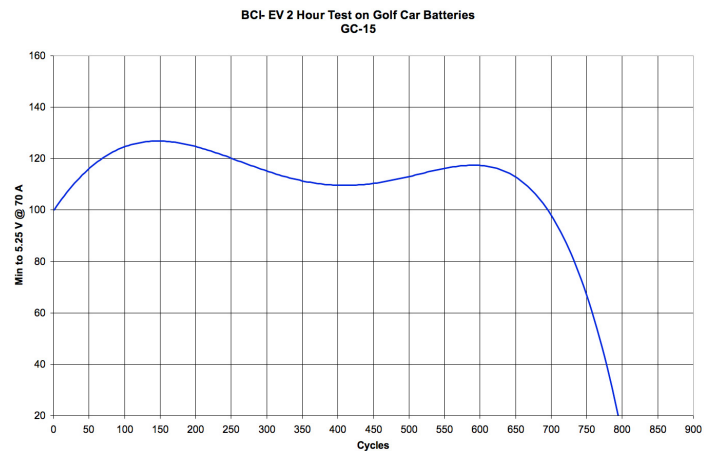

MK Battery

1645 South Sinclair Street • Anaheim, California 92806
Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-Mail: sales@mkbattery.com

