



30 YEAR LINEAR POWER WARRANTY
ANNI GARANZIA LINEARE PRODUZIONE

20 YEAR PRODUCT WARRANTY
ANNI GARANZIA PRODOTTO

COMMERCIAL LINE

SG325/330P

 **MADE IN ITALY MODULE**

PEIMAR polycrystalline solar panels made in Italy provide customers with a perfect combination of high-efficiency and versatility. Thanks to the use of high-quality solar cells, our panels achieve outstanding performance and ensure maximum production output even under poor lighting and weather conditions. The strong yet ultra-light frames, available in silver or black make installation easy but robust in either residential, commercial or large-scale settings.



POSITIVE POWER OUTPUT TOLERANCE



PID FREE



MODULE FIRE PERFORMANCE: **CLASS I**



ANTI-REFLECTIVE GLASS



HAILSTORM RESISTANCE

CELLS

72
POLY



QTY:
72 CELLS
TYPE:
POLY 4BB-5BB
DIMENSION:
156x156 mm / 6x6"

FRAME



BACKSHEET



JUNCTION BOX



ELECTRICAL CHARACTERISTICS (STC)*

	SG325P	SG330P
Nominal Output (Pmax)	325 W	330 W
Flash Test Power Tolerance	0/+5	0/+5
Voltage at Pmax (Vmp)	36,3 V	36,4 V
Current at Pmax (Imp)	9,03 A	9,07 A
Open Circuit Voltage (Voc)	44,6 V	45,1 V
Short Circuit Current (Isc)	9,74 A	9,78 A
Maximum System Voltage	1000 V	1000 V
Maximum Series Fuse Rating	15 A	15 A
Cell Efficiency	18,55%	18,83%
Module Efficiency	16,74%	17,00%

MECHANICAL CHARACTERISTICS

Solar Cells	72 (6x12) polycrystalline
Solar Cells Size	156x156 mm / 6x6"
Front Cover	3.2 mm / 0.12" thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silve
Backsheet finishing	White
Diodes	3 Bypass diodes serviceable
Junction Box	IP67 rated
Connector	MC4 or compatible connector
Cables Length	900 mm / 35.4"
Cables Section	4.0 mm ² / 0.006 in ²
Dimensions	1957x992x40 mm / 77x39x1,57"
Weight	22.5 Kg / 49.6 lbs
Max. Load	Certified to 5400 Pa

TEMPERATURE CHARACTERISTICS

NOCT**	45±2 °C
Temperature Coefficient of Pmax	-0.43 %/°C
Temperature Coefficient of Voc	-0.32 %/°C
Temperature Coefficient of Isc	0.047 %/°C
Operating Temperature	-40 °C ~ +85°C


PACKAGING***

Pallet dimensions	2000x1200x1200 mm / 79x47x47"
Pieces per pallet	27
Weight	622 Kg / 1371 lbs

CERTIFICATIONS



Fire Resistance Rating	1 (UNI 9177)
------------------------	--------------

DIMENSIONS

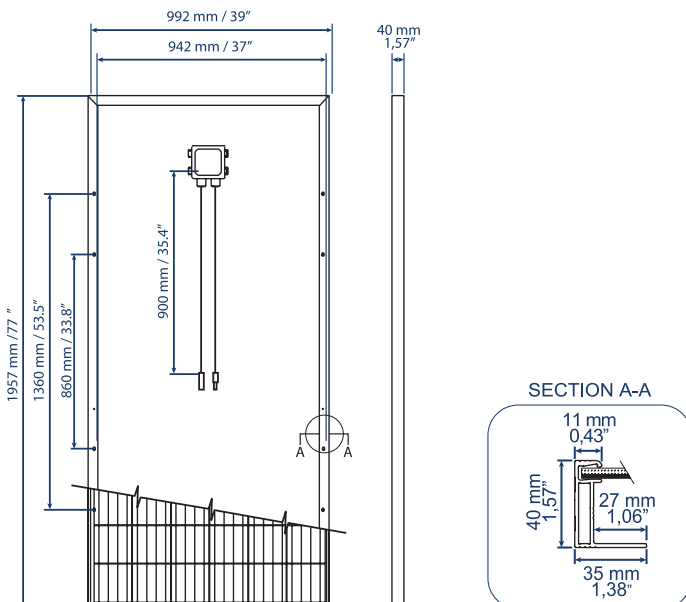

CURRENT/VOLTAGE CHARACTERISTICS

Values apply to modules: SG325P

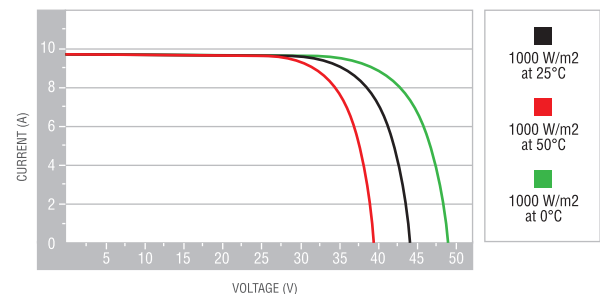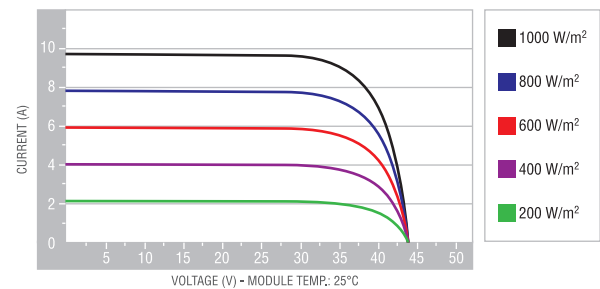

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

**NOCT: Nominal Operation Cell Temperature Sun 800W/m²; Air 20°C; Wind speed 1m/s

***Pallets can be stacked up to two

It is important to point out, that all technical specifications, information and figures contained in this datasheet are estimated values. Peimar reserves the right to change the technical specifications, information and figures contained in this document at any time without notice.

EN_VERS 1_03/2018

PEIMAR
ITALIAN PHOTOVOLTAIC MODULES

Via Creta 72, 25124 Brescia, ITALY • www.peimar.com • info@peimar.com