



# Product Information Sheet

## Solar Module


### BSP-2012

#### General Information

High performance multi-crystalline cells  
 High energy yields in a wide variety of climates  
 Anodized aluminum frame provides for easy mounting

#### Qualification and Certificates

UL Listing Pending

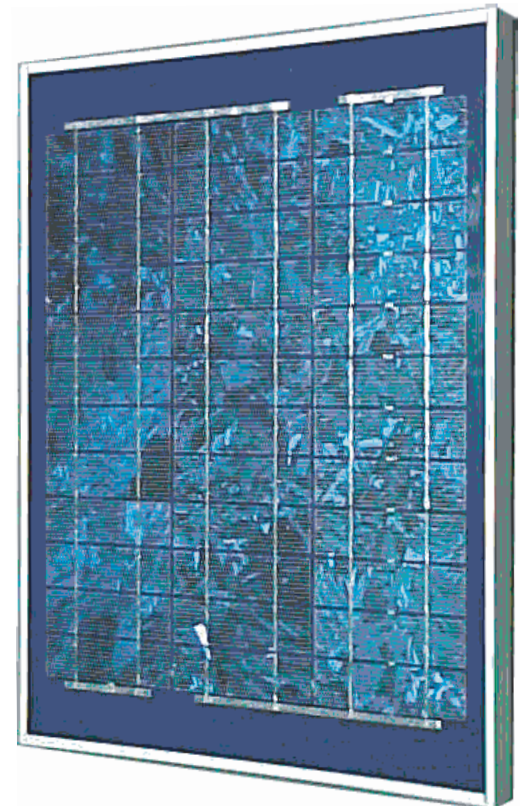

**BSP-2012**  
**20 Watt Module**

Electrical Characteristics		
Typical Data At STC		
		BSP-2012
Rated Power	Pr	20W
Peak Power	Pmpp	20W
Peak Power Voltage	Vmpp	17.3V
Peak Power Current	I <sub>mp</sub>	1.20A
Open Circuit Voltage	Voc	21.7V
Short Circuit Current	Isc	1.30A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m<sup>2</sup> irradiance, AM 1.5 spectrum and 25° C cell temperature.

Physical Characteristics		
Length	Inches (mm)	27.48 (698)
Width	Inches (mm)	20.94 (532)
Thickness	Inches (mm)	1.33 (33.8)

Cable Type		
Cable Length	feet (cm)	15.0 (457.2)

5 Year Warranty

