

# SLP020-12C1D2

High Efficiency Multicrystalline PV Module



Certified to UL1703 and cUL1703  
Certified for Hazardous Environments  
C1D2 - Class 1, Division 2

Electrical Characteristics	SLP020-12C1D2
Product code	020011264
Maximum power (Pmax)	20W
Voltage at Pmax (Vmp)	17.5V
Current at Pmax (Imp)	1.14A
Open-circuit voltage (Voc)	20.83V
Short-circuit current (Isc)	1.21A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%



\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

\*NOCT: Nominal operating cell temperature (the data is only for reference)




## Module Diagram

Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit: mm[in.]

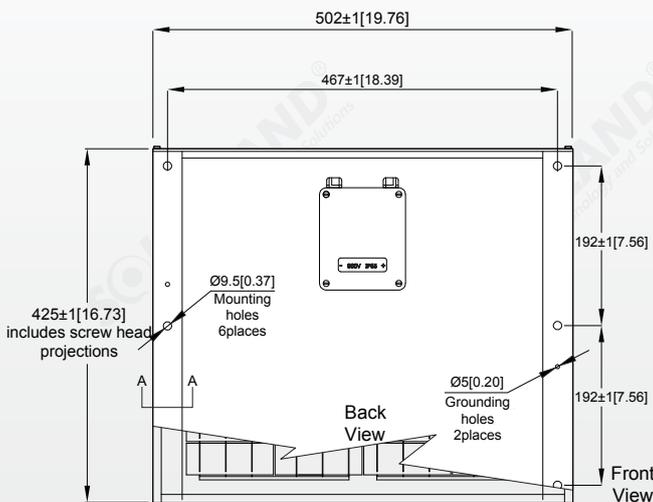


Junction Box  
Top View(Lid Open)



## Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron,tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

## Characteristics

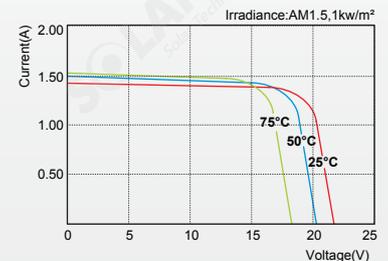

SLP020-12C1D2 I-V Curves

Specifications	SLP020-12C1D2
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module dimension	425mm[22.68in.]x502mm[14.06in.]x50mm[1.97in.]
Weight	2.8kg[6.17lbs]
Packing information(Carton)	530mm[20.87in.]x250mm[9.84in.]x455mm[17.91in.]/(4pcs/ctn)

\*Limited warranty: 2-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

\*Specifications are subject to change without notice at any time.