

# SLP060-12C1D2

High Efficiency Multicrystalline PV Module




Certified to UL1703 and cUL1703  
Certified for Hazardous Environments  
C1D2 - Class 1, Division 2


Electrical Characteristics	SLP060-12C1D2
Product code	060011233A
Maximum power (Pmax)	60W
Voltage at Pmax (Vmp)	18.64V
Current at Pmax (Imp)	3.22A
Open-circuit voltage (Voc)	22.18V
Short-circuit current (Isc)	3.42A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%

\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

\*NOCT: Nominal operating cell temperature (the data is only for reference)

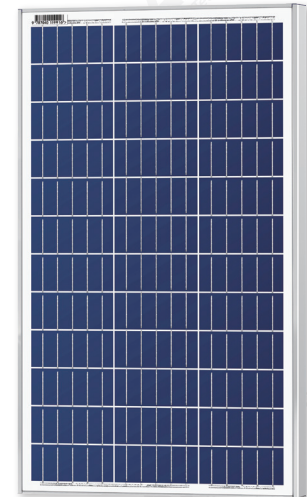


## Module Diagram

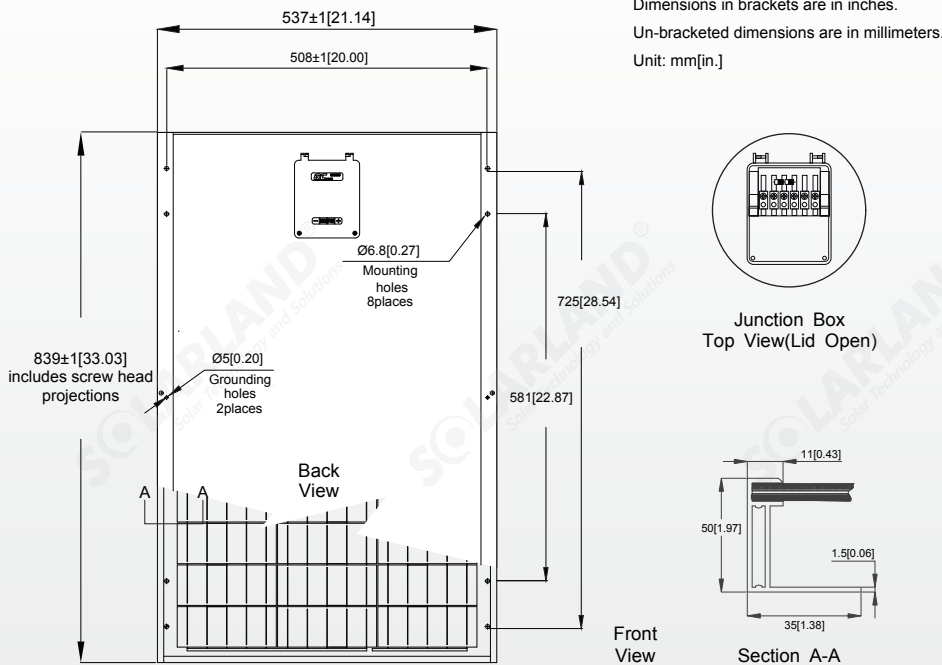

## Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

## Characteristics

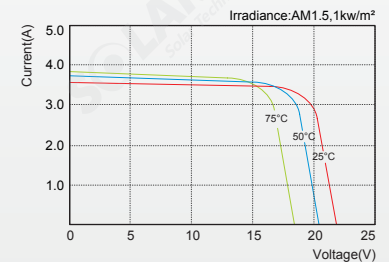

SLP060-12C1D2 I-V Curves

Specifications	SLP060-12C1D2
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(3X12)
Module dimension	839mm[33.03in.]x537mm[21.14in.]x50mm[1.97in.]
Weight	5.8kg[12.57lbs]
Packing information(Carton)	870mm[34.25in.]x250mm[9.84in.]x565mm[22.24in.]/(2pcs/ctn)

\*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

\*Specifications are subject to change without notice at any time.