


# SLP100S-12

## High Efficiency Monocrystalline PV Module


Electrical Characteristics	SLP100S-12
Product code	100021216
Maximum power (Pmax)	100W
Voltage at Pmax (Vmp)	17.2V
Current at Pmax (Imp)	5.81A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	6.39A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	± 5%

\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

\*NOCT:Nominal operating cell temperature (the data is only for reference)

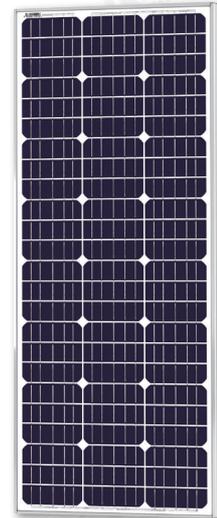


### Module Diagram

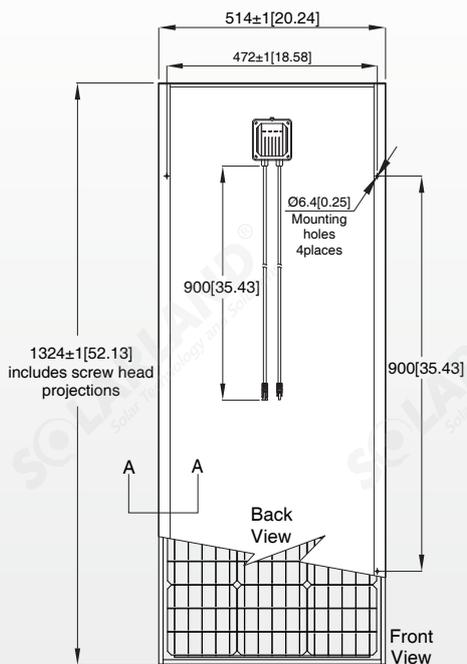


Dimensions in brackets are in inches.

Un-bracketed dimensions are in millimeters.

Unit: mm[in.]



Junction Box  
Top View(Lid Open)




Section A-A

### Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron,tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

### Characteristics

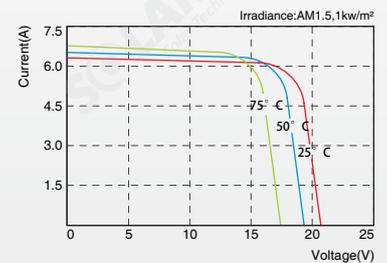

SLP100S-12 I-V Curves

Specifications	SLP100S-12
Cells	Monocrystalline silicon solar cell
No. of cells and connections	72(3X24)
Module dimension	1324mm[52.16in.]x514mm[20.24 in.]x35mm[1.38in.]
Weight	7.8kg[17.20lbs]
Packing information(Carton)	1367mm[53.82in.]x559mm[22.01in.]x70mm[2.76in.]/(1pc/ctn)

\*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

\*Specifications are subject to change without notice at any time.