





**Solartech** Power, Inc.  
**SPECIFICATIONS**

ELECTRICAL CHARACTERISTICS			
Model	SPM060M-N		
Power at STC (Pm)	60W		
Maximum power voltage (Vpm)	20.1V		
Maximum power current (Ipm)	3.1A		
Open circuit voltage (Voc)	24.5V		
Short circuit current (Isc)	3.4A		
Tolerance	±5%		
Module efficiency	16.8%		
Standard test conditions	Temperature 25°C, Irradiance 1000W/m <sup>2</sup> , AM=1.5		
Maximum system voltage	1000V DC	Series fuse rating	15A
Temperature coefficient	Isc:0.05%/K	Voc:-0.36%/K	Pmax:-0.46%/K

Specifications	
Cell	Monocrystalline silicon solar cell, (156mmx52mm)
No. of cell and connection	36 (4x9)
Dimension	666mm (26.2in) x 537mm (21.1in) x 35mm (1.38in)
Weight	5.0KG

AMBIENT CONDITIONS	
Operating Temperature	-40°C to +85°C
Storage Humidity	<90%

Output	
Type of output terminal	Junction box
Cable	L:900mm

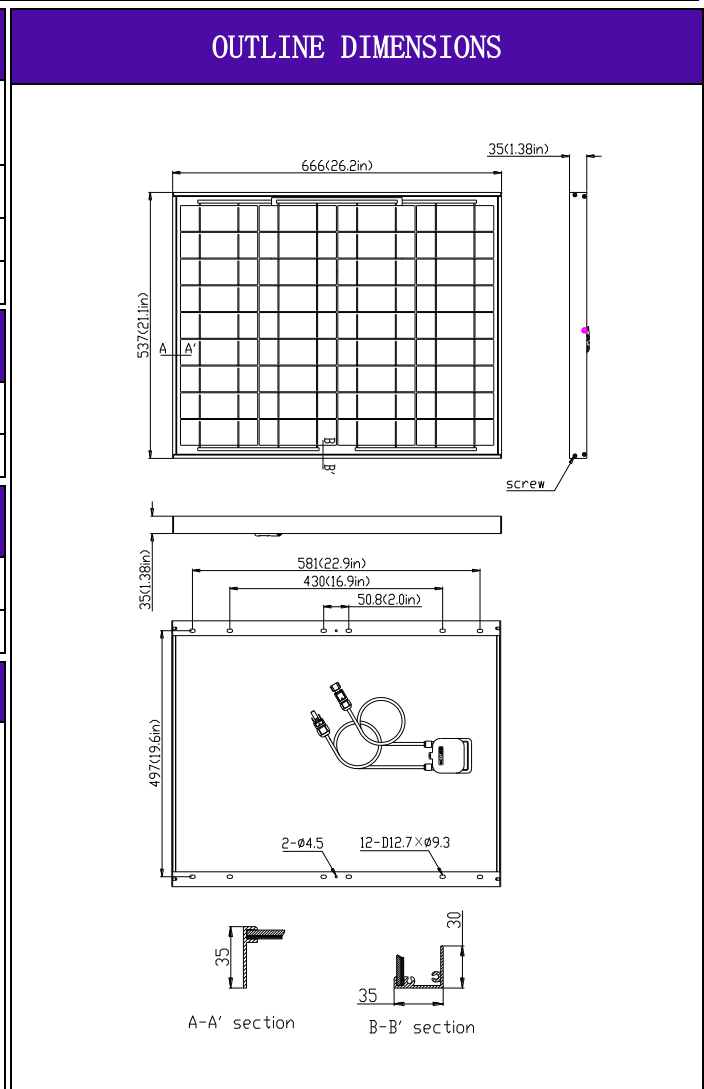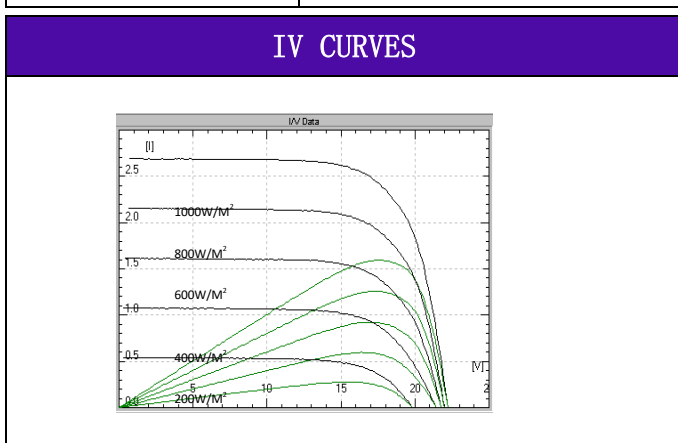

**SOLARTECH POWER, INC.**  
 901 E CEDAR ST  
 ONTARIO, CA 91761 USA  
[www.solartechpower.com](http://www.solartechpower.com)  
[sales@solartechpower.com](mailto:sales@solartechpower.com)  
 TOLL: 866-777-6527  
 TEL: 909-673-0178  
 FAX: 909-947-2919