

PURE SINE WAVE INVERTERS (200/400)

CATEGORY:


PURE SINE WAVE INVERTERS

MODEL RANGE:

GP-ISW200

GP-ISW400

IDEAL FOR:



GP-ISW200



GP-ISW400



**2 YEAR
WARRANTY**

GP-ISW200 / GP-ISW400

Premium mobile power in a sleek, lightweight profile. Bring reliable, cUL-certified power on the road with Go Power!'s Industrial Pure Sine Wave Inverter.

KEY FEATURES



**AC POWER FOR OPTIMAL
PERFORMANCE**



**RUNS ANY DEVICE
IN WATTAGE RANGE
WITHOUT INTERFERENCE**



**FULL OVERLOAD
PROTECTION**



**DURABLE, LOW
PROFILE**



WIDE VOLTAGE RANGE



POWERSAVE MODE



AVAILABLE IN 12V AND 24V



DUAL GFCI OUTLETS




P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St,
Victoria, British Columbia,
Canada, V8T 5J3

SPECIFICATIONS*	GP-ISW200	GP-ISW400
Continuous Output Power	200 W (VA)	400 W (VA)
Maximum Surge Rating	250 W (VA)	800 W (VA)
Output Waveform	Pure Sine Wave	
Output Voltage Range $\pm 3\%$	100 - 120 VAC (Dip Switch Selectable)	
Input Voltage	12 V: 10 - 16 VDC 24 V: 20 - 32 VDC	
Efficiency	12 V: 89% 24 V: 91%	12 V: 88% 24 V: 89%
No Load Current Draw / Powersave	12 V: <0.5A 24 V: <0.4A	12 V: <1A @ 12VDC 24 V: <0.5 @ 24VDC
Input Protection	Reverse Polarity (Fuse) / Under Voltage / Over Voltage	
Output Protection	Short Circuit / Overload / Over Temperature	
Low Battery Alarm ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10 V 24 V: 21 V	
Low Battery Shutdown ± 0.3 V (± 0.5 V for 24 V inverters)	12 V: 10 V 24 V: 20 V	
Operating Temperature Range	-4° F - 140° F (-20° C - 60° C)	
Storage Temperature Range	-22° F - 158° F (-30° C - 70° C)	
Cooling	Temperature and Load Controller Cooling Fan	
AC Output Connections	Dual GFCI Outlet	
Dimensions (W x H x L)	5.91 x 2.68 x 7.36 inch (150 x 68 x 187 mm)	
Weight	3.5 lbs (1.6 kg)	3.5 lbs (1.6 kg)
MTBF	130,000 Hours	
Neutral	Bonded	
Warranty	2 Years	
Inverter Install Kits	GP-DC-KIT1	
Remotes (Optional)	GP-SWR-A	
Regulations and Safety	EMC/Certified FCC Class B	EMC/Certified FCC Class B/ Certified UL 458

*Specifications subject to change without notice

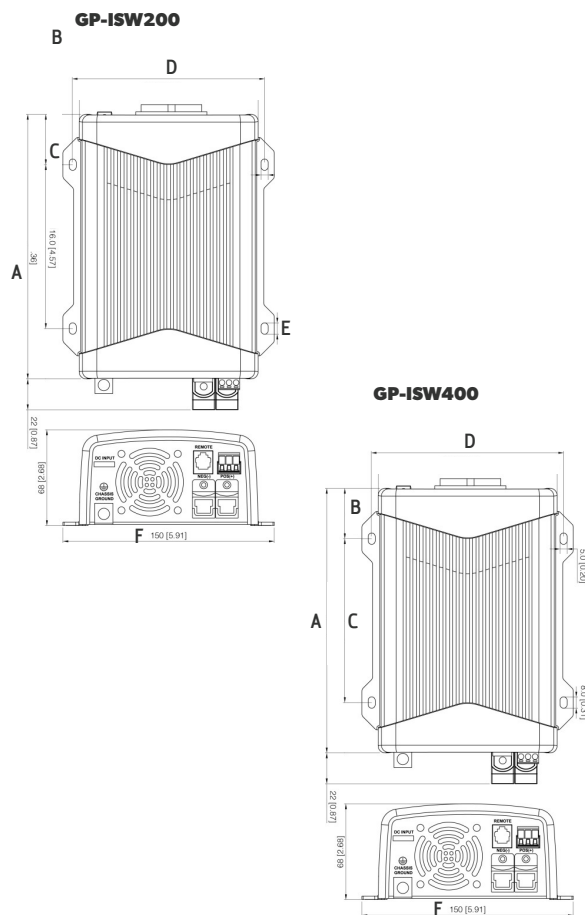

MODEL	A	B	C	D	E	F
GP-ISW200	7.36" (187 mm)	1.4" (35.7 mm)	4.6" (116 mm)	5.4" (136 mm)	0.3" (8 mm)	5.91" (150 mm)
GP-ISW400	7.4" (187 mm)	1.4" (35.7 mm)	4.6" (116 mm)	5.4" (136 mm)	0.3" (8 mm)	5.91" (150 mm)

PROTECT YOURSELF AND YOUR EQUIPMENT.

FUSE AND CABLE KITS

Go Power! DC installation kits include everything you need to properly connect your Go Power! inverter to the batteries safely. The kit includes 10' large gauge battery cables, tie downs, lugs, and the appropriate inverter fuse (class T fuse) and mounting block.




12 VOLT	INVERTER SIZE
GP-DC-KIT 2	600-1000 W
GP-DC-KIT 3	1100-1800 W
GP-DC-KIT 4	2000-2500 W
GP-DC-KIT 5	2600-3000 W

REMOTELY TURN YOUR INVERTER ON/OFF AND SAVE BATTERY POWER.

INVERTER REMOTE

Remotely power appliances or electronics with the compact Go Power! inverter remote. The remote features an LED indicator showing inverter status, an ON/OFF switch and 25' of cable.



P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St,
Victoria, British Columbia,
Canada, V8T 5J3