

Side of Pole/Wall Mount Bracket

(For use with Solarland SLP085 – SLP135 Panels)

SLB-0114

info@solarland.com

www.solarlandusa.com



Side of Pole/Wall Mount Bracket

(For use with Solarland SLP085 – SLP135 Panels)

SLB-0114

The Solarland® SLB-0114 has been specifically designed to be used with the Solarland® SLP Series panels ranging in size from 85W – 135W. This simple fixed bracket provides a safe and secure mount to a pole, wall or fence.

Specifications

Mounting Type	Side of Pole/Wall Mount
Module Type	Specifically designed to work with Solarland SLP series
module Type	panels, but can be adapted for use with other panels
Number of Modules	Mounts 1 Panel
Setting Angle	0°~90°
Wind Load	100km/Hr
Snow Loading	1.1kN/m²
Warranty	5 Years

Kit Components & Parts


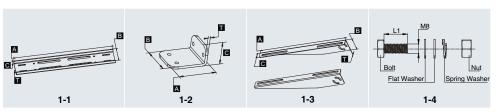


Diagram	Component	Material	Surface Treatment	Quantity	Dimensions
1-1	Fixed Bracket 5052Al	505241	NI/A		A=800mm[34.50in.],B=110mm[4.33in.]
1-1		cket 5052Al N/A 1	'	C=25mm[0.98in.], T=5.0mm[0.20in.]	
1-2	Fixed Bracket 5052Al	N/A	2	A=100mm[3.94in.],B=83mm[3.27in.]	
		JUJZAI	IN/A		C=50mm[1.97in.], T=6.0mm[0.24in.]
1-3	Tilt Arm 5052A	N/A	2	A=675mm[26.57in.],B=82mm[3.23in.]	
		5052A	IN/A		C=38mm[1.50in.], T=3mm[0.12in.]
1.4	Module Bolt	AISI304	N/A	4	M8X25[0.98in.]
1-4	Mounting Bolt	AISI304	N/A	8	M8X25[0.98in.]

*Note: U-Bolts or Steel Clamps are not supplied in this kit and must be procured separately if pole mount is required

Mounting Diagram

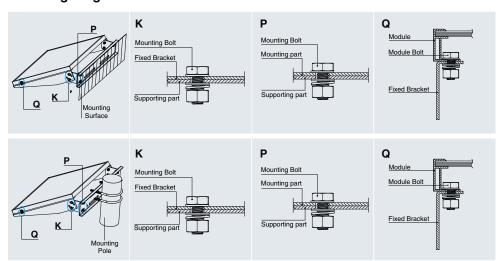

Note:

When using this kit with another brand of panel you may need to change the module bolts (1-4) to suit the mounting holes on the panel. Here we offer M8 & M6 bolt for customers choice.